


EZWELD®

Solvent Cements, Primers & Cleaners

PRODUCT GUIDE FOR KINGDOM OF SAUDI ARABIA

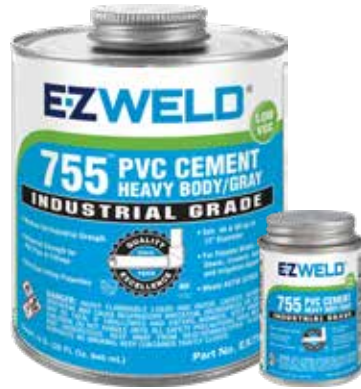

LOW VOC
E-Z Weld products are manufactured to have Low Volatile Organic Compounds

OUR NAME IS OUR BOND



EZWELD®

Solvent Cements, Primers & Cleaners

PRODUCT GUIDE FOR KINGDOM OF SAUDI ARABIA



786 CPVC CEMENT HEAVY BODY / ORANGE

- FLOWGUARD / Industrial Grade Line of Products
- Orange, heavy body, CPVC cement for use on pipe and fittings up to 12" (300 mm) diameter.
- Industrial strength cement recommended for residential and commercial hot and cold water systems up to 180 °F (82 °C).
- Meets ASTM D2846 and F493

Industry Listing	Hydrostatic Burst Strength	Lap Shear Strength	Size	Part No.
UPC® NSF PW, DWV, SW	Minimum 400 psi	Minimum 250 psi	4 oz / 118 ml	78601
	after 2 hour cure @ 73 °F (23 °C)	after 2 hour cure @ 73 °F (23 °C)	8 oz / 237 ml 16 oz / 473 ml 32 oz / 946 ml	78602 78603 78604



766 PVC CEMENT REGULAR BODY / CLEAR

- Clear, Regular Body PVC / uPVC cement for use on pipe and fittings up to 4" (100 mm) for schedule 40.
- To be used for plumbing, electrical conduit, non-pressure pool and spa and PVC foam core pipe.
- Meets ASTM D2564

Industry Listing	Hydrostatic Burst Strength	Lap Shear Strength	Size	Part No.
NSF PW, DWV, SW	Minimum 400 psi	Minimum 250 psi	4 oz / 118 ml	76601
	after 2 hour cure @ 73 °F (23 °C)	after 2 hour cure @ 73 °F (23 °C)	8 oz / 237 ml 16 oz / 473 ml 32 oz / 946 ml	76602 76603 76604



755 PVC / uPVC CEMENT HEAVY BODY / GRAY

- Industrial Grade Line of Products
- Gray, heavy body, PVC / uPVC cement for use on all classes and schedules of PVC pipe and fittings with interference fit through 12" (300 mm) diameter.
- Industrial strength cement formulated for gap filling, recommended for plumbing, industrial, irrigation and electrical conduit.
- Meets ASTM D2564

Industry Listing	Hydrostatic Burst Strength	Lap Shear Strength	Size	Part No.
UPC® NSF PW, DWV, SW	Minimum 400 psi	Minimum 250 psi	4 oz / 118 ml	75501
	after 2 hour cure @ 73 °F (23 °C)	after 2 hour cure @ 73 °F (23 °C)	8 oz / 237 ml 16 oz / 473 ml 32 oz / 946 ml	75502 75503 75504



733 PIPE CLEANER

- Clear, fast acting cleaner effectively removes oil and grease from the surfaces of PVC / uPVC, CPVC, ABS and styrene pipe and fittings.
- Highly recommended for use before priming of pipe and fittings.

Size	Part No.
4 oz / 118 ml	73301
8 oz / 237 ml	73302
16 oz / 473 ml	73303
32 oz / 946 ml	73304



722 PURPLE PRIMER

- Purple, fast acting primer for proper softening and preparation of all schedules and sizes of PVC and CPVC pipe and fitting surfaces.
- Meets ASTM F656

Industry Listing	Size	Part No.
UPC® NSF PW, DWV, SW	4 oz / 118 ml	72201
	8 oz / 237 ml	72202
	16 oz / 473 ml	72203
	32 oz / 946 ml	72204

Authorized Importer & Distributor
of E-Z Weld Branded Solvent Cements, Cleaners and Primers in the Kingdom of Saudi Arabia

Call Us:
920008479



info@umc-ksa.net
www.umc-ksa.net

Branches: ●Riyadh ●Jeddah ●Qassim ●Dammam ●Madinah ●Jizan ●Abha